


# fan kit 0385, 12V / 24V DC

for oil/air blast coolers ASA 0176/0177/0256/0257, TT 16/25

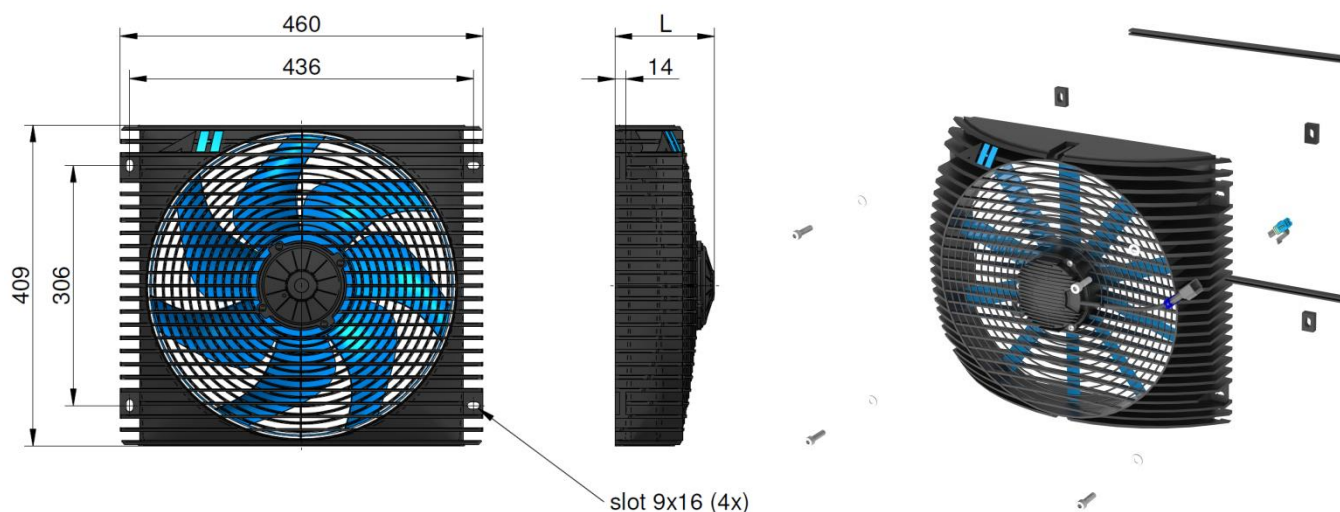


## Technical Data \*)

| order number | description          | current**) [A] | motor power [kW] | protection level | L [mm] | weight [kg] |
|--------------|----------------------|----------------|------------------|------------------|--------|-------------|
| ILLELE0385A1 | fan kit 0385, 12V DC | 21,2 ±3        | 0,242            | IP 68            | 130    | 4,8         |
| ILLELE0385A2 | fan kit 0385, 24V DC | 11,4 ±3        | 0,242            | IP 68            | 130    | 4,8         |

\*\*) given data are running currents, free air flow, for start up higher currents have to be calculated!

## Performance Data

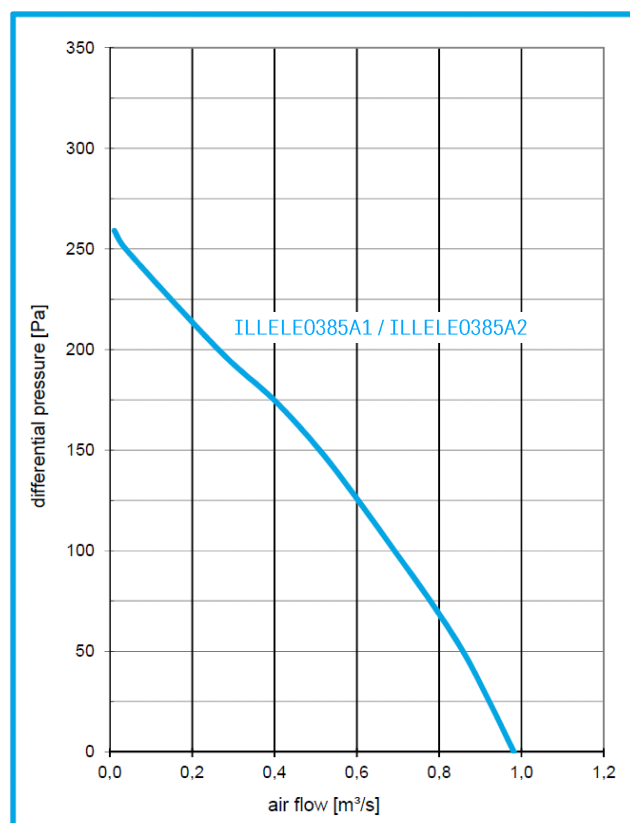

### ambient conditions

|                                               |                 |
|-----------------------------------------------|-----------------|
| ambient temperature range                     | -20°C to +80°C  |
| storage temperature range                     | -40°C to +120°C |
| Important: Assure sufficient air circulation! |                 |

### supply

|                                                                |              |
|----------------------------------------------------------------|--------------|
| 12V DC ± 10%                                                   | 24V DC ± 10% |
| maximum allowed ripple                                         | 1%           |
| Check for right polarity! Inverse polarity may damage the fan! |              |

### recommended fuse (slow acting)

|              |      |
|--------------|------|
| ILLELE0385A1 | 30 A |
| ILLELE0385A2 | 15 A |

### housing

|          |           |
|----------|-----------|
| material | polyamide |
|----------|-----------|

### accessories

|                     |                      |
|---------------------|----------------------|
| temperature control | ILLZTC12K, ILLZTC24K |
|---------------------|----------------------|

### content of fan kit

1x fan unit, 4x screws, 4x screw nuts, 8x washer, 2 sealing profiles, 1x counter connector, 4x distance blocks

\*) all data refer to tests with 13V and 26V DC, respectively

Please contact us for further options and assistance.