

FORCHE FOTB


I - Forca a cilindro orizzontale per lavori agricoli

GB - Grab with horizontal cylinder for agricultural works


D - Mistgreifer mit liegendem Zylinder für die landwirtschaftliche Arbeit

F - Fourche à vérin horizontal pour les travaux agricoles

E - Horquilla con cilindro horizontal para el trabajo agrícola

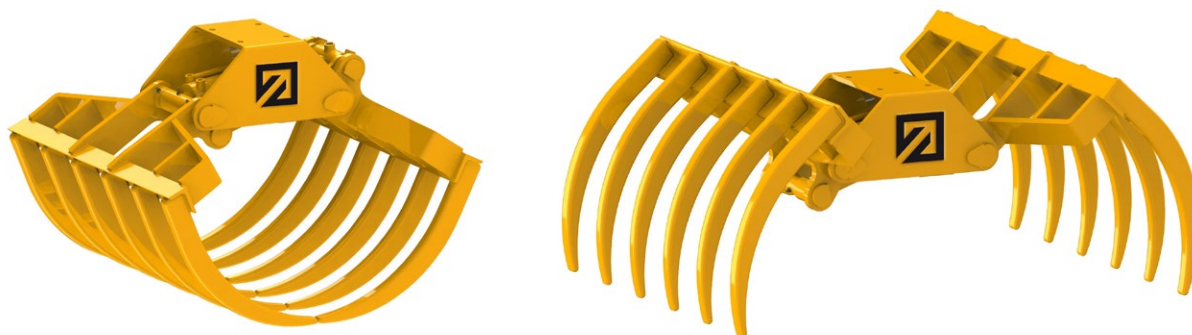

DISEGNO TECNICO / TECHNICAL DRAWING

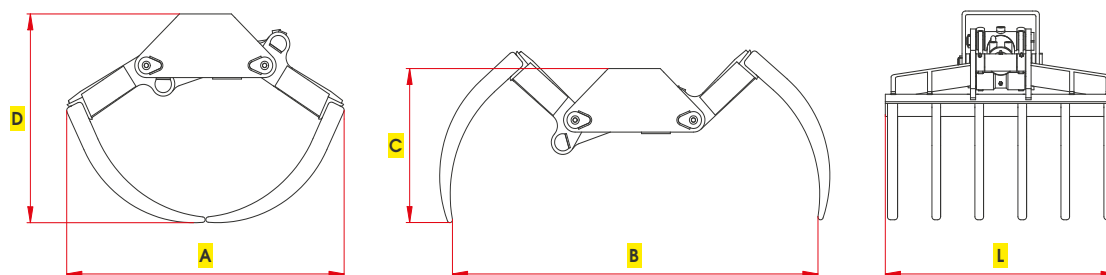

Portata gru a braccio sfilato / Lifting capacity at the end of boom



Peso escavatore / Excavator weight

Modello Type	Denti Teeth	Peso Weight	Pressione Pressure	Portata olio Oil flow			A	B	C	D	L
	nr.	kg	Max bar	Lt/min	Ton.	Ton.	mm	mm	mm	mm	mm
FOTB 6	6	110	250	20	0,2-0,4	2,0-3,0	960	1270	510	690	400
FOTB 8	8	130	250	20	0,4-0,6	3,0-4,0	960	1270	510	690	500
FOTB 10	10	145	250	20	0,4-0,9	3,0-7,0	960	1270	510	690	650
FOTB 12	12	165	250	20	0,6-1,0	4,0-8,0	960	1270	510	690	800
FOTB 14	14	185	250	20	0,8-1,5	5,0-9,0	960	1270	510	690	950
FOTB 16	16	205	250	20	1,0-1,8	6,0-10	960	1270	510	690	1100
FOTB L 8	8	90	200	15	0,15-0,3	1,2-1,8	895	1120	465	613	450
FOTB L 10	10	97	200	15	0,2-0,4	1,5-2,2	895	1120	465	613	550
FOTB L 12	12	110	200	15	0,2-0,6	1,8-2,5	895	1120	465	613	700

L = Serie leggera \ Light serie