




Modello DS
DS Version



Benne bivalve con cilindro orizzontale, con pareti demontabili, ideale per carico rifiuti. Clamshell bucket with horizontal cylinder, with dismantlable sides, for loading waste materials.

Modello DSF
DSF Version



Modelli Models	Capacità Capacity	Peso Weight	Denti Teeth	A	B	C	D	L	Portata Load capacity	Forza utile Closing force	Pressione Pressure	 ton*	 ton**	Rotatore consigliato Suggested rotator	 type
	lt	kg	n°	mm	mm	mm	mm	mm	kg	daN	bar				
FCB 35 DS	35	32	3	456	624	357	304	305	100	433	200	0,1-0,3	0,8-1,0	FR 15 - FR 35	
FCB 35 DSF	35	32	3	456	624	357	304	305	100	433	200	0,1-0,3	0,8-1,0	FR 15 - FR 35	
FCB 50 DS	50	52	4	626	895	492	390	330	150	821	200	0,2-0,4	0,8-1,2	FR 35	
FCB 50 DSF	50	52	4	626	895	492	390	330	150	821	200	0,2-0,4	0,8-1,2	FR 35	
FCB 100 DS	100	85	4	770	1100	605	480	350	200	974	200	0,2-0,5	1,0-1,5	FR 35 - FR 35F	
FCB 100 DSF	100	85	4	770	1100	605	480	350	200	974	200	0,2-0,5	1,0-1,5	FR 35 - FR 35F	
FCB 125 DS	125	134	4	840	1200	660	523	450	250	1737	200	0,3-0,7	1,2-1,7	FR 35 - FR 35F	
FCB 125 DSF	125	134	4	840	1200	660	523	450	250	1737	200	0,3-0,7	1,2-1,7	FR 35 - FR 35F	
FCB 155 DS	155	143	4	840	1200	660	523	550	350	1737	200	0,4-0,8	1,2-2,0	FR 35 - FR 35F	
FCB 175 DS	175	152	4	840	1200	660	523	650	350	1737	200	0,5-0,9	1,5-2,2	FR 35 - FR 35F	
FCB 205 DS	205	161	6	840	1200	660	523	750	450	1737	200	0,6-1,0	1,8-2,5	FR 35 - FR 35F	
FCB 225 DS	225	170	6	840	1200	660	523	850	450	1737	200	0,7-1,2	1,8-3,0	FR 35 - FR 35F	
FCB 325 DS	325	208	6	1040	1430	780	565	800	700	1477	200	0,9-1,3	2,5-3,5	FR 50 - FR 55F	
FCB 360 DS	360	220	8	1040	1430	780	565	900	700	1477	200	0,9-1,5	2,5-4,0	FR 50 - FR 55F	
FCB 425 DS	425	232	8	1040	1430	780	565	1000	700	1477	200	1,0-1,6	3,0-5,0	FR 50 - FR 55F	
FCB 525 DS	525	315	8	1200	1640	905	660	1000	1000	1550	200	1,0-2,0	4,0-7,0	FR 50 - FR 55F	
FCB 625 DS	625	343	8	1200	1640	905	660	1200	1000	1550	200	1,0-2,0	4,0-7,0	FR 85 SXF	

In conformità EN 2006 42 CE - According to EN 2006 42 EC


* portata gru a braccio sfilato - crane capacity at max reach

** peso escavatore - excavator weight

Valvola di blocco optional - Optional block valve



Pareti demontabili
Demountable sides

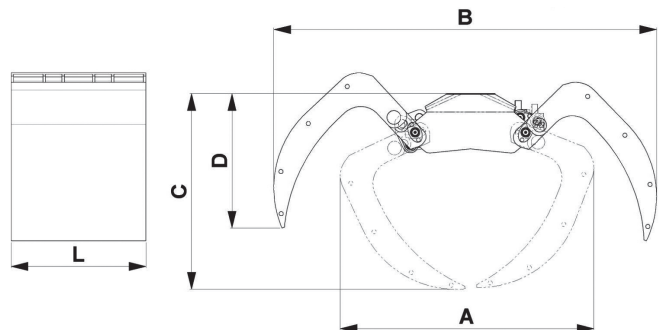

Adattatore montaggio
benna a rotatore
Quick coupling